


SPF 3000TL LVM-US

- Integrated MPPT charge controller.
- Equalization charging function.
- Work with or without battery
- PV input voltage up to 250VDC.
- Generator connection available
- Configurable grid or solar input priority.
- Optional WIFI/GPRS remote monitoring
- Support parallel operation for capacity expansion up to 18kW.
- PV and grid power the load jointly if PV energy is insufficient.
- Flexibly schedule the Inverter charging and discharging time.

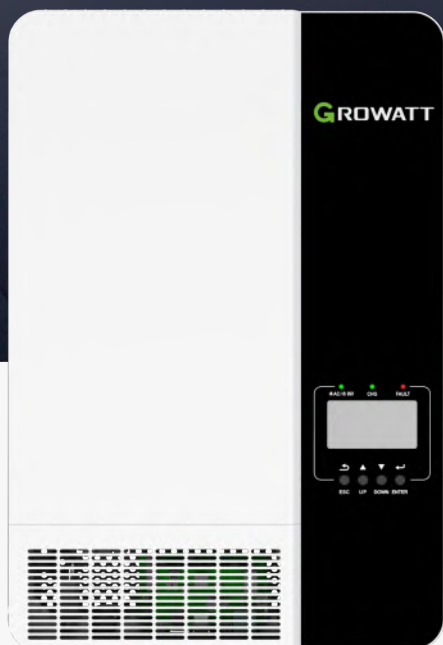

P O W E R
- I N G O
T O M O -
R R O W O

GROWATT

www.ginverter.com

Datasheet	SPF 3000TL LVM-US
Battery Voltage	48VDC
Battery Type	Lithium/Lead-acid
INVERTER OUTPUT	
Rated Power	3000VA/ 3000W
Parallel Capability	Yes, 6 units maximum
AC Voltage Regulation (Battery Mode)	100Vac/110Vac/120Vac @ 50/60Hz
Surge Power	6000VA
Efficiency (Peak)	90%
Waveform	Pure sine wave
Transfer Time	10ms typical, 20ms Max
SOLAR CHARGER	
Maximum PV Array Power	4000W
MPPT Range @ Operating Voltage	120VDC ~ 250VDC
Number of Independent MPP Trackers/ Strings Per MPP Tracker	1/1
Maximum PV Array Open Circuit Voltage	250VDC
Maximum Solar Charge Current	80A
AC CHARGER	
Charge Current	40A
AC Input Voltage	120VAC
Selectable Voltage Range	95-140VAC (For Personal Computers) ; 65-140VAC (For Home Appliances)
Frequency Range	50Hz/60Hz (Auto sensing)
PHYSICAL	
Protection Degree	IP20
Dimension (W/H/D)	320/470/135mm
Net Weight (kgs)	12
OPERATING ENVIRONMENT	
Humidity	5% to 95% Relative Humidity(Non-condensing)
Operating Temperature	0°C - 50°C
Storage Temperature	-15°C - 60°C
Certification	UL STD.1741、CSA STD, CSA C22.2 No.107.1

Split-phase parallel application

